



Corning® Varioptic® C-C-39N0-160 Auto Focus Lens Module

Overview

The Corning® Varioptic® C-C-39N0-160 auto focus lens module is an electronically controllable focus C-Mount lens based on the Corning® Varioptic® A-39N0 variable focus lens. It incorporates the necessary electronic components to drive the lens and only needs a DC power supply. Focus can be controlled through either an RS232, I2C, Analog or SPI input. With a 16 mm effective focal length and 2/3" sensor compatibility, it is specifically designed for machine vision applications. For more information on this module, please refer to the C-C-39N0-160 Technical Datasheet (TEDS).

Ordering Information

Corning® Varioptic® C-C-39N0-160-XX auto focus lens module where **XX** determines objective lens configuration:

- **Corning® Varioptic® C-C-39N0-160-I2C auto focus lens module:** I2C or analog operation.
- **Corning® Varioptic® C-C-39N0-160-RS33 auto focus lens module:** RS232 with 3.3 V signal or analog operation.
- **Corning® Varioptic® C-C-39N0-160-R12 auto focus lens module:** RS232 with 12 V signal or analog operation.
- **Corning® Varioptic® C-C-39N0-160-SPI auto focus lens module:** SPI operation only.

Key Features

- Variable focus from 11 cm to infinity
- Functions quietly
- Supports I2C - Analog - RS232 - SPI interfaces
- Supports closed loop operation



Contents

Opto-Electrical Performance.....	2
Temperature Range	3
Mechanical Dimensions.....	3
Electrical Connection.....	4
Electrical Specifications.....	5
Analog Control.....	5


Opto-Electrical Performance

Performances described below are for 25°C

<i>Optical Performances at V_{∞}</i>	<i>Symbol</i>	<i>Min</i>	<i>Typ</i>	<i>Max</i>	<i>Unit</i>	<i>Notes</i>
Voltage for infinite focus	V_{∞}		46		V	(2)
Focal length at V_{∞}	EFL		16		mm	
Image circle diameter			11		mm	
Corner Chief Ray Angle	CRA		0		°	
Flange distance			17.5		mm	(3)
F- number	F#		2.8		-	
Diagonal Field of view	DFOV		38		°	(4)
<i>Focus control performances</i>						
Focus distance	x	11		∞	cm	(2)
Voltage for x= 11cm	V_{11cm}		62		V	(2)

Notes:

- (1) For more information on the behavior of the C-C-39N0-160 or the A-39N0, please refer to the lens and module full datasheet.
- (2) Distance to object refers to the principal plane of the objective lens as shown below:

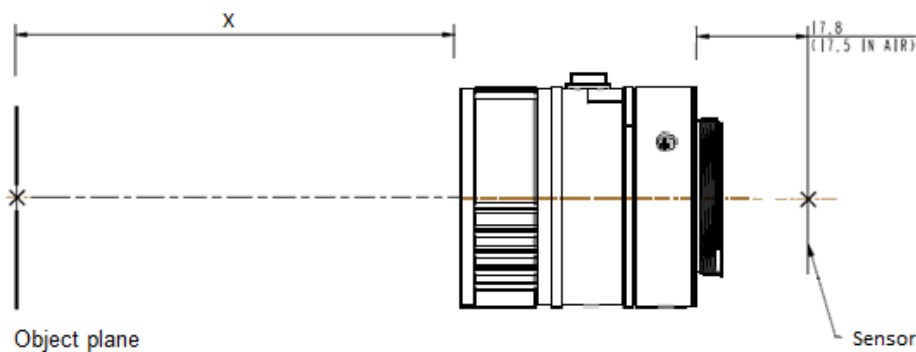


- (3) Refer to ISO 10935.
- (4) For a sensor size of 2/3".


Temperature Range

Parameter	Unit	Min	Typ	Max	Notes
Operating temperature range	°C	0°C	25	+50°C	TBC
Storage temperature range	°C	-40°C	25	+85°C	TBC

Mechanical Dimensions

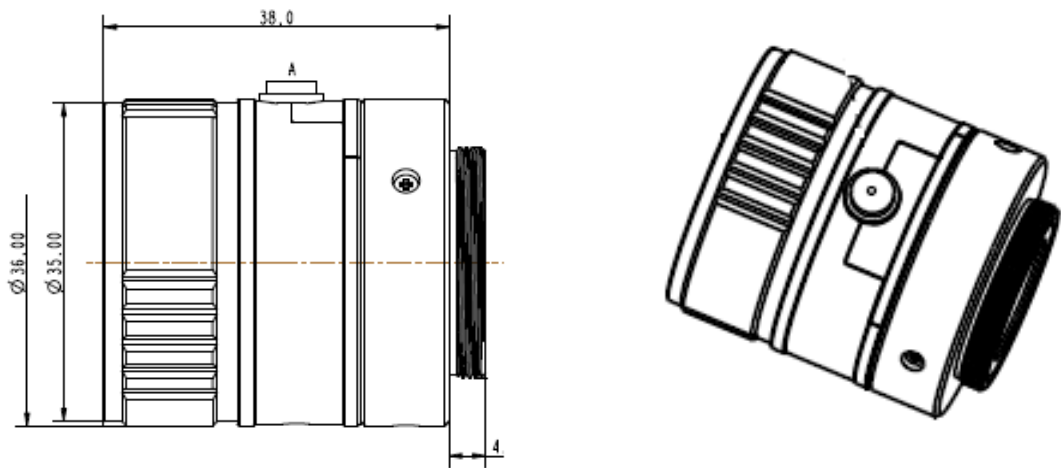

Weight: 120g

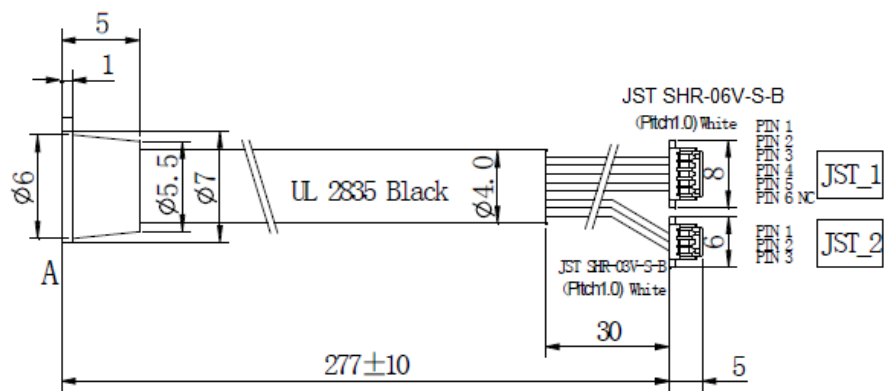


Electrical Connection

The C-C-module has a 6-pin connector for power and control (JST_1).

Connector reference: JST SHR-06V-S-B

Wire reference: JST SH3-SH3-28300

These pins have different functions depending on the module version.

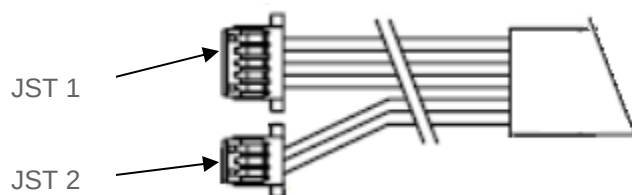

Communication Terminal JST_1

<i>Pin</i>	<i>Name</i>	<i>Description</i>
1	VIN	Positive power supply (+3.3 to +24 VDC/ red wire)
2	GND	Ground (black wire)
3	I2Csd_a_Rx_SDI	Multipurpose pin (depending on the part/ yellow wire)
4	I2Csc_l_Tx_SCK	Multipurpose pin (depending on the part/ blue wire)
5	SDO_Ana	Multipurpose pin (depending on the part)
6	MCLR	Programming pin (must be unconnected)

The function of the multipurpose pins depends on the part number:

C-C-39N0-250-					
<i>Pin</i>	<i>Name</i>	<i>R12</i>	<i>R33</i>	<i>SPI</i>	<i>I2C</i>
3	I2Csd_a_Rx_SDI	Rx (RS232)	Rx (3.3V)	SDI	SDA
4	I2Csc_l_Tx_SCK	Tx (RS232)	Tx (3.3V)	SCK	SCL
5	SDO_Ana	Analog input	Analog input	SDO	Analog input

Programming Terminal JST_2

<i>Pin</i>	<i>Name</i>	<i>R12</i>	<i>R33</i>	<i>SPI</i>	<i>I2C</i>
1	ICSPDAT	Rx (RS232)	Rx (3.3V)	SDI	SDA
2	ICSPCLK	Tx (RS232)	Tx (3.3V)	SCK	SCL
3	MCLR	Analog input	Analog input	SDO	Analog input

Electrical Specifications

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Power supply						
Input voltage	V _{CC}	3.3	5	24	V	
Current consumption - Active mode	I _{CC}		50		mA	(1)
Current consumption – Standby mode	I _{CC Stb}		12		mA	
Control voltage						
RS12						
I2Csda_Rx_SDI / I2CscI_Tx_SCK pins		-25		25	V	(2)
RS33/I2C/SPI						
I2Csda_Rx_SDI / I2CscI_Tx_SCK pins		-0.3		3.6	V	(2)
SDO_Ana pin		-0.3		3.6	V	(2)
MCLR pin		-0.3		3.6	V	

Notes:

- (1) Current consumption depends on the voltage applied on the lens. Value given for 4.5 V power supply. See below chart for more details.

Typical current consumption I_{CC} (mA)

Driver state and voltage applied		(standby)	25 V	70 V
Power supply	3.3V	16.4	70	100
	4.5V	12	50	71
	12V	4.5	27	34
	24V	2.2	20	23

- (2) Absolute maximum ratings.

Analog Control

Corning® Varioptic® C-C-39N0-160 modules, except for the SPI version, can be controlled by an analog voltage. In this case, the voltage seen by the lens is given by the following equation:

$$V_{rms} = (V_a * 22.5) + 24 \quad \text{with } 0V < V_a < 2V$$

With:

- V_{rms} : rms value of the voltage seen by the lens (AC voltage)
- V_a : analog input voltage (DC voltage)

Corning reserves the right to change its product specifications at any time without notice. Please ensure you have the latest applicable specification before purchasing a Corning product. It is customer responsibility to determine the suitability of Corning's product to its own application. Corning does not provide any warranty of merchantability or fitness for a particular purpose. Product specifications are available upon request at varioptic@corning.com.